

MODEL SG-BIN 3/9

Bin Centre Deodorization System



Product information

| | |
|------------------|--|
| Air volume | 0~2000 m ³ /h (adjustable) |
| Application area | 50~600 m ² (Depending upon # of tubes) |
| Shell material | Powder Coated Steel |
| Weight | 32.5 kg |
| Product size | 1080*450*280 mm |
| Noise | ≤50 dB |
| Filter type | High-efficiency filter / medium-efficiency filter bag (optional) |

Electrical

| | |
|---|------------------|
| Rated Voltage | AC 110V / AC 220 |
| Frequency | 50 / 60 Hz |
| Power | 290 W |
| Internal Fuse/overload safety protection design and Power dual protection | |

Ionization Tube

| | |
|---------------------|---|
| Quantity | 3 to 9 ion tubes |
| Size | 350 mm |
| Estimated Tube Life | 17000 Hours |
| Material | Various composite materials, stainless steel outer mesh |




APPLICATION

The PurAire SG-BIN3/9 is a customizable bipolar ionization system designed for external mounting in a bin centre or a grease trap room where there are substantial odours in a dusty / dirty environment.

It can also be ceiling mounted inside a space when appropriate.

It's ionization level is customizable based upon the number of ion tubes installed.

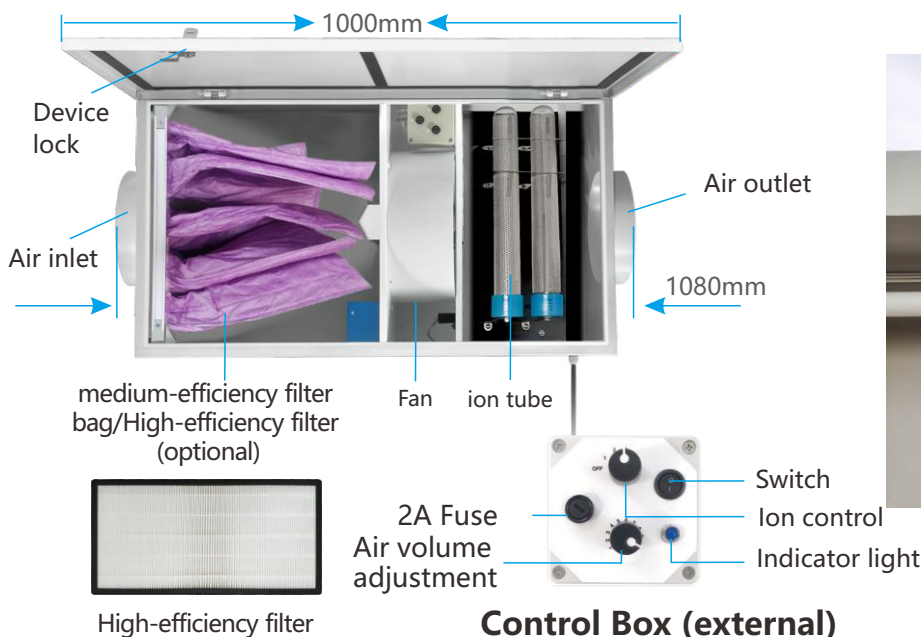

Typical External Installation